

Bar Type | MS-Line Surface Mount Lamp

- PSE/CE certificated converter is built in.
- High efficiency diffusion plate
- Easy installation using bracket
- High efficiency and long life span
- IP 65 (optional)




> Applications

Underground parking lot, Interior lighting, Clean Room
Super market, Subway, Blackboard lighting
Factory, Raceway etc.


> Certificate




> Easy One Touch Installation

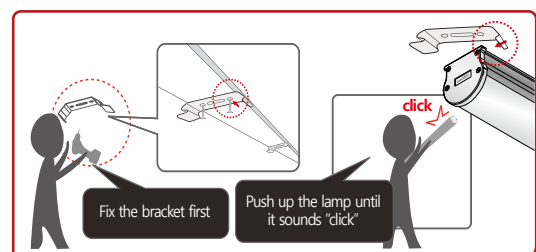


> Dimensional Drawing (Unit : mm)

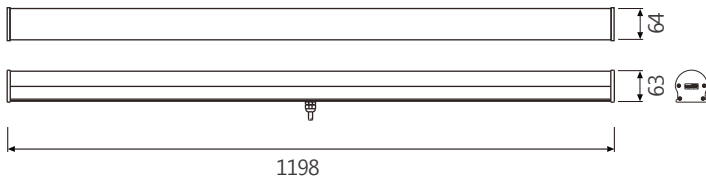

> Energy Saving Effect

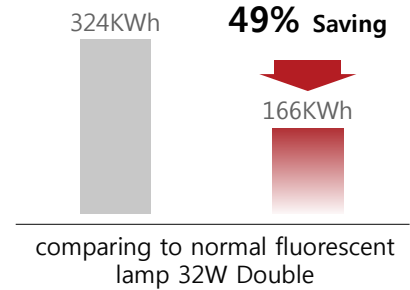

> Beam profile / Illumination (38W)

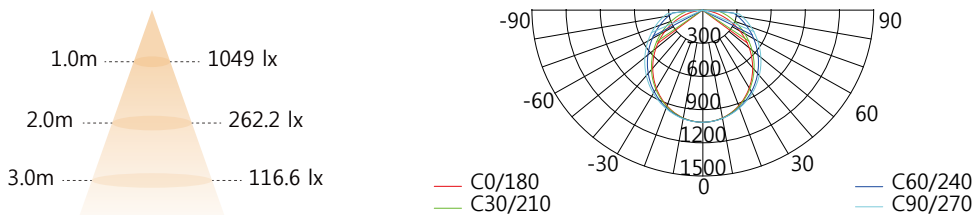

> Specifications (Other color temperature is also possible by order quantity)



Product Code	Input Power (W)	Input Voltage (V)	Power Factor	Input Current (A)	Total Luminous Flux (lm)	Luminance Efficiency (lm/W)	C.C.T (K)	Color Rendering Index (Ra)	Rated Life Span (h)	Product Type (mm)	Weight (Kg)
MS-12L18	18	100~240	0.9	0.19	1,620	90	5,000 5,700 6,500	85	50,000	1200	1.5
MS-12L20	20	100~240	0.9	0.21	1,800	90	5,000 5,700 6,500	85	50,000	1200	1.5
MS-12L25	25	100~240	0.9	0.26	2,250	90	5,000 5,700 6,500	85	50,000	1200	1.5
MS-12L30	30	100~240	0.9	0.32	2,700	90	5,000 5,700 6,500	85	50,000	1200	1.5
MS-12L38	38	100~240	0.9	0.40	3,420	90	5,000 5,700 6,500	85	50,000	1200	1.5