

LED Flat Panel | 300x600

- High Efficiency
- M-bar, T-Bar, Clip-Bar, Surface Mount Type Available
- Dimming Function(Optional)
- Free Voltage (AC 100V~240V)




> Applications

Office, Hospital, Hotel, Super Market, Corridor, School etc.


> Certificate



> **Dimensional Drawing** (Unit : mm)

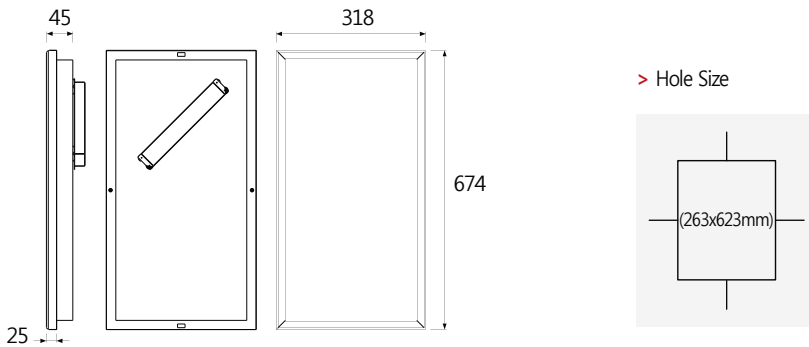

> **Beam profile / Illumination** (26W)

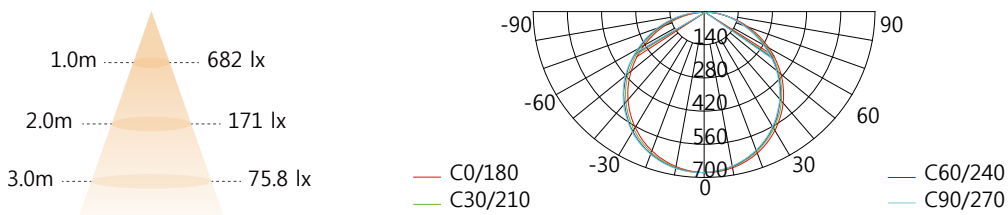

> **Specifications** (Other color temperature is also possible by order quantity)



Product Code	Input Power (W)	Input Voltage (V)	Power Factor	Input Current (A)	Total Luminous Flux (lm)	Luminance Efficiency (lm/W)	C.C.T (K)	Color Rendering Index (Ra)	Rated Life Span (h)	Weight (Kg)
FR-306S20	20	100~240	0.9	0.21	1,700	85	5,000 5,700 6,500	85	50,000	3.1
FR-306S26	26	100~240	0.9	0.27	2,210	85	5,000 5,700 6,500	85	50,000	3.1